






- For CATV indoor use.
- All F female connector.
- Input/output impedance 75Ω.
- Designed SMD technology achieves high stability.
- RFI shielded metal housing with ABS plastic frames.
- With equalizers and adjustable control this amplifier provide correct signal level.

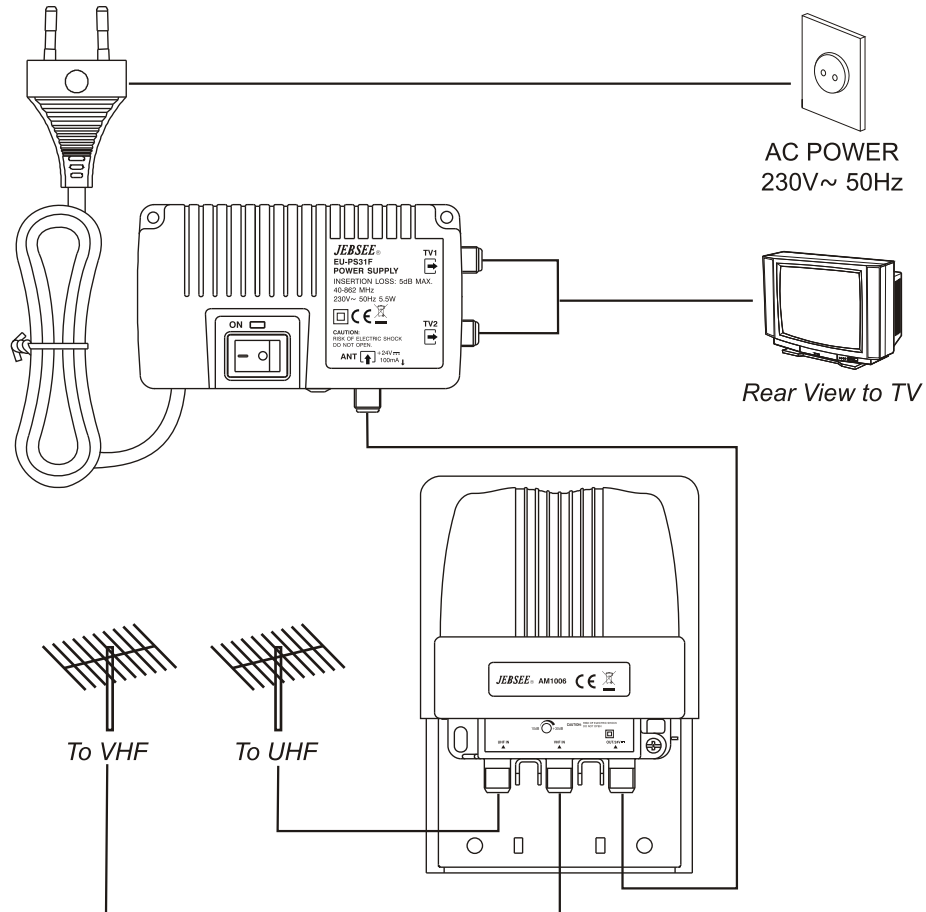

## ● SPECIFICATIONS

FREQUENCY RANGE .....	170-230	470-862
GAIN .....	30dB	35dB
GAIN CONTROL .....	0~20	0~15
NOISE FIGURE .....	3.5dB Max.	3.5dB Max.
INPUT RETURN LOSS .....	5NOR 3dB MIN.	5NOR 3dB MIN.
OUTPUT RETURN LOSS .....	6dB MIN.	6dB MIN.
MIN. output level DIN 45004B		
disturbance 3 order intermod.60dB(dBμV) .....	103dBμV	
POWER SUPPLY .....	230V~ 50Hz 6W	 

## ● BLOCK DIAGRAM

